

MACO EAGLE COLOR SURVEILLANCE FILM 640

High Speed Colour Negative Film

MACO EAGLE COLOR SURVEILLANCE FILM 640 is a panchromatic negative colour film, designed for traffic surveillance or scientific photography. This film renders excellent definition and low granularity, combined with a very high speed emulsion.

The film is processed in Agfa ASP70 Process or the equivalent C41.

Thickness of the polyester base: 100 µm

Total film thickness: 124 µm

Applications

The film is designed designed for traffic surveillance and scientific photography in a variety of cameras.

Due to the advanced fine grain technology, images for scientific applications with low light/long exposure or very short exposure are of the best quality and permit contact prints or enlargements.

MACO EAGLE COLOR SURVEILLANCE FILM 640 can be copied onto Agfa Rapitone C1 & C2 paper or Avitone CP94 / CP70 print films.

Features

- Very high speed emulsion, which can still be increased during processing. Surface extended multi-structured (XMS) crystals are used to achieve this high speed.
- With this high-speed emulsion, imagery can be captured with very small light sources at long exposure times for scientific applications.
- The low density colour mask using the triple masking technique safeguards colour purity and faithfulness.
- The wide exposure latitude strongly reduces the need for repeat flights.
- No Schwarzschild effect for shutter speeds ranging from 1/10,000 up to 1 second.
- Six DIR (= Developer Inhibitor Release) couplers with varying performance characteristics are enhancing the colour rendition, sharpness and granularity of the emulsion. Colour couplers in the interlayers are increasing the efficiency of the crystals' activity and contribute to finer granularity.
- The special non-gelatinous back-layer ensures a perfect grip to high speed capstans and rollers without adherence of backing residuals over longer periods of time. The backing is optimised for very fast film transportation in high speed cameras.

Technical specifications

Speed

ISO 800/30, ASA 800, DIN 30 for processing in Agfa ASP 70 Process at 37.8°C/100°F during 3 min 17 s or 4 min.

Exposure


Exposure latitude: -1 to +3 f-stops

A slight over exposure/development of **MACO EAGLE COLOR SURVEILLANCE FILM 640** will increase the colour saturation of the prints.

Exclusively Available in Australia & New Zealand from:

INDEPENDENT PHOTOGRAPHIC SUPPLIES Pty Ltd	INDEPENDENT PHOTOGRAPHIC SUPPLIES NZ Limited
ABN: 36 105 600 351	Coy. # 1951487
P.O. Box 317, Thornleigh NSW 2120 Australia	P.O. Box 35840, Browns Bay, Auckland 0753 New Zealand
Ph: +61 2 9875 2244 Fax: +61 2 9875 5448	Ph - 1: +64 2 7485 7220 Ph - 2: +64 2 7472 2064
email: sales@iphoto.net.au www.iphoto.net.au	email: sales@iphotonz.co.nz www.iphotonz.co.nz


Spectral Sensitivity

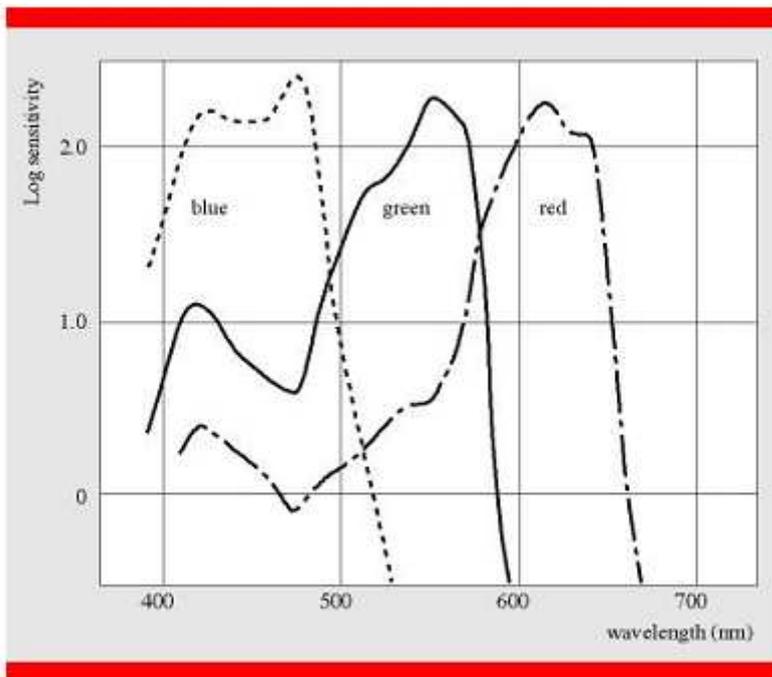

The curves refer to a density of 0.5 above base fog. The film is exposed to an equi-energetic spectrum. Sensitivity is reciprocal to the exposure expressed in mJ/m^2 , required to produce the indicated density.

Colour rendering/Spectral density

Triple masking technology (orange mask) is used for controlling the colour rendering. The best colour balance is obtained at standard ASP70/C41 processing.

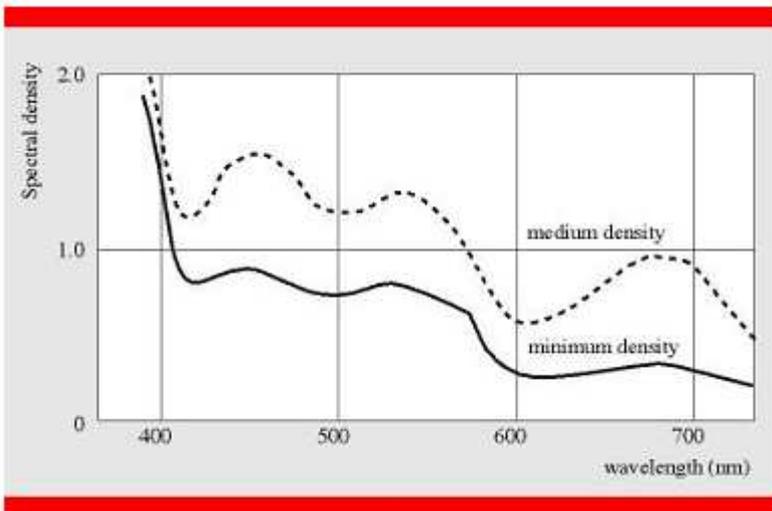

The curves show the spectral density measured on the processed image (neutral object with medium brightness), per wavelength. Standard processing.

Granularity

Due to the fine grain property, the **MACO EAGLE COLOR SURVEILLANCE FILM 640** minimises the loss of details, even when enlarged.

Exclusively Available in Australia & New Zealand from:

INDEPENDENT PHOTOGRAPHIC SUPPLIES Pty Ltd	INDEPENDENT PHOTOGRAPHIC SUPPLIES NZ Limited
ABN: 36 105 600 351	Coy. # 1951487
P.O. Box 317, Thornleigh NSW 2120 Australia	P.O. Box 35840, Browns Bay, Auckland 0753 New Zealand
Ph: +61 2 9875 2244 Fax: +61 2 9875 5448	Ph - 1: +64 2 7485 7220 Ph - 2: +64 2 7472 2064
email: sales@iphoto.net.au www.iphoto.net.au	email: sales@iphotonz.co.nz www.iphotonz.co.nz

RMS Granularity

The RMS granularity measured at a diffuse visual density of 1.0 with 48 µm spot size equals $RMS (x1000) = 9$

Sharpness

Due to the use of the DIR technology (developer Inhibitor Release) inhibitors in the emulsion are active during development to achieve better differentiation of densities within one colour. The visual effect results in clear-cut marking and enhanced sharpness.

TOC (target Object Contrast)

Measured according to ANSI PH 2.33-1980


TOC 1000:1 = 110 lp/mm or 220 dots/mm

TOC 1.6:1 = 40 lp/mm or 80 dots/mm


TOC resolution is a purely visual criterion, affected significantly by the contrast range.

Colour Density Curves.

Processing at 37.8 C° for 3 min15 s

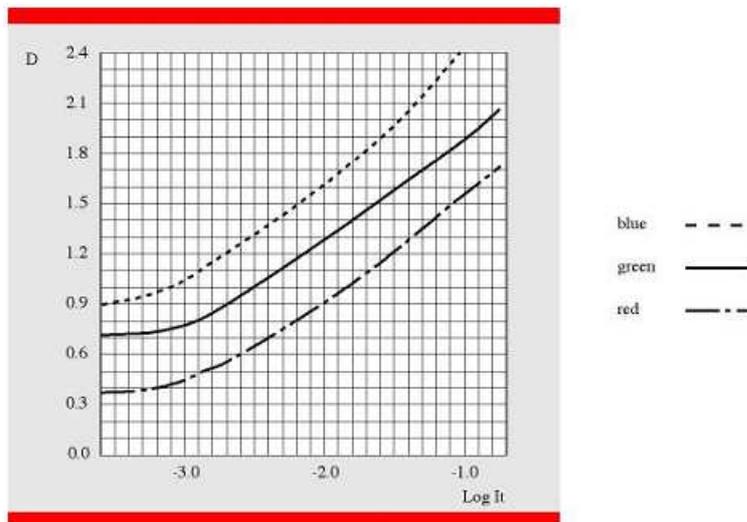


Processing at 37.8 C° / 4 min

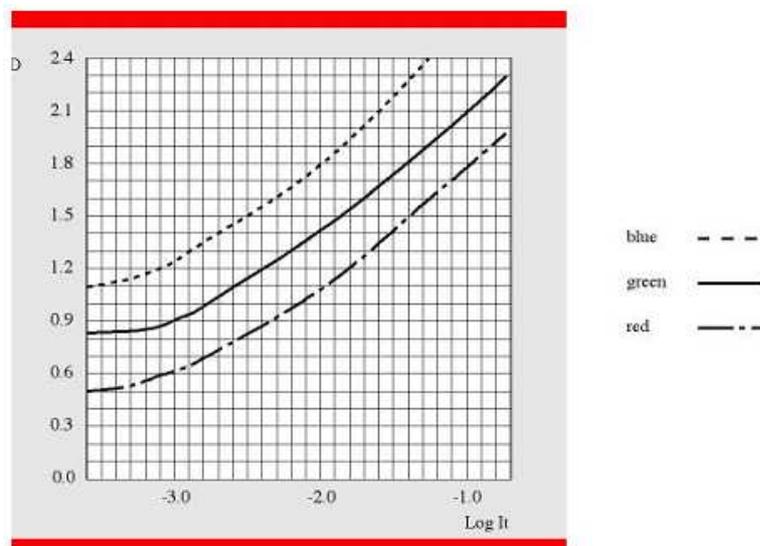

Exclusively Available in Australia & New Zealand from:

INDEPENDENT PHOTOGRAPHIC SUPPLIES Pty Ltd	INDEPENDENT PHOTOGRAPHIC SUPPLIES NZ Limited
ABN: 36 105 600 351	Coy. # 1951487
P.O. Box 317, Thornleigh NSW 2120 Australia	P.O. Box 35840, Browns Bay, Auckland 0753 New Zealand
Ph: +61 2 9875 2244 Fax: +61 2 9875 5448	Ph - 1: +64 2 7485 7220 Ph - 2: +64 2 7472 2064
email: sales@iphoto.net.au www.iphoto.net.au	email: sales@iphotonz.co.nz www.iphotonz.co.nz

Film structure

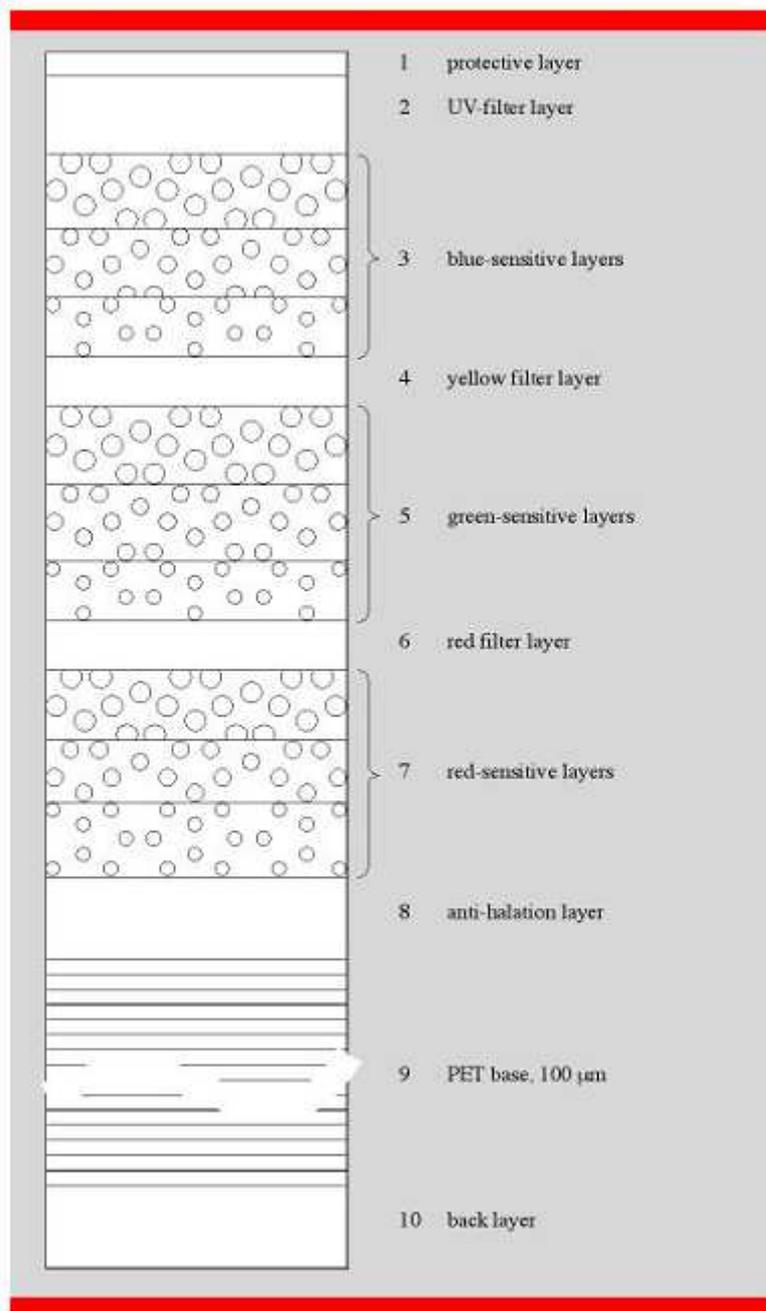

Total film thickness: 100 µm PET + 22 µm colour layers + 2 µm back layer = 124 µm.

Exclusively Available in Australia & New Zealand from:

INDEPENDENT PHOTOGRAPHIC SUPPLIES Pty Ltd	INDEPENDENT PHOTOGRAPHIC SUPPLIES NZ Limited
ABN: 36 105 600 351	Coy. # 1951487
P.O. Box 317, Thornleigh NSW 2120 Australia	P.O. Box 35840, Browns Bay, Auckland 0753 New Zealand
Ph: +61 2 9875 2244 Fax: +61 2 9875 5448	Ph - 1: +64 2 7485 7220 Ph - 2: +64 2 7472 2064
email: sales@iphoto.net.au www.iphoto.net.au	email: sales@iphotonz.co.nz www.iphotonz.co.nz

Production Guidelines

Film handling

Wear cotton gloves, both before and after processing the film.

Avoid direct contact between emulsion and other objects like rollers to prevent scratches that can be picked-up at scanning.

Avoid manipulation of freshly processed film.

Handle film in low dust environments. Use an anti-static cleaning device for film before duplicating/scanning.

Luggage X- Ray at airports

High-speed films should never be checked in with normal luggage, but kept with your hand luggage.

Visual checks are always safer. This applies in particular to high-speed films, because the sensitivity of a film to X-rays is proportional to its sensitivity to visible light.

Darkroom lighting

The film must be handled in complete darkness in its pre-processing stage.

Exposure

Recommended speed setting: 600 to 1000 ASA. To get the best possible exposure, make a series of test images representative of the exposure, flying altitude and atmospheric conditions. Use the camera that you expect to use for the task and process in the machine and under the conditions foreseen for the real job. Your best image should show no under-exposure; extreme over-exposure or over-processing may also degrade the details in the image.

Filters are not required for daylight exposure.

Processing

MACO EAGLE COLOR SURVEILLANCE FILM 640 is preferably processed in a machine filled with Agfa ASP70 chemistry.

Archiving

MACO EAGLE COLOR SURVEILLANCE FILM 640 can be archived for a very long time, if the material has been processed in a professional way and according to the instructions. Dark fading (loss of a certain colour dye in dark storage) is due to inadequate washing and/or stabilising during processing. Light fading (loss of colour dye due to exposure to light) hastens colour deterioration. If the films are to be stored for maximum duration – i.e. centuries -, we recommend to keep them stored in a dark room and in their original plastic film containers, at a RH ranging from 30% to 50% and at a temperature of max 24 °C/75 °F. Protect the film from effects caused by harmful gases (formaldehyde-, turpentine- and vapour, hydrogen sulphide or ammonia).

Exclusively Available in Australia & New Zealand from:

INDEPENDENT PHOTOGRAPHIC SUPPLIES Pty Ltd	INDEPENDENT PHOTOGRAPHIC SUPPLIES NZ Limited
ABN: 36 105 600 351	Coy. # 1951487
P.O. Box 317, Thornleigh NSW 2120 Australia	P.O. Box 35840, Browns Bay, Auckland 0753 New Zealand
Ph: +61 2 9875 2244 Fax: +61 2 9875 5448	Ph - 1: +64 2 7485 7220 Ph - 2: +64 2 7472 2064
email: sales@iphoto.net.au www.iphoto.net.au	email: sales@iphotonz.co.nz www.iphotonz.co.nz

Shelf life

Unexposed **MACO EAGLE COLOR SURVEILLANCE FILM 640** films should be stored in a cool and dry place, in its original packaging at a temperature below 13 °C/55 °F. The expiry date indication on the film cans refers to those conditions. The photographic properties can be kept stable in freezers (at temperatures below -10 °C/+14 °F) for an extended period of time. After removal from the freezer, the film needs to adapt to the ambient temperature for some 12 hours, before the original packaging can be opened. If not, some water condensation (drops) may be formed on the film especially in high RH environments. Avoid any unprotected manipulation of film at high temperatures or in extreme RH circumstances. Also keep clear from harmful gases. Exposed films are best processed immediately. The latent image drift – although small – may affect the image quality in case of long delayed processing.

Dimensional Stability of MACO EAGLE COLOR SURVEILLANCE FILM 640

Temporary dimensional changes:

- Thermal coefficient of linear expansion (-20°C to +50°C): 0.0018% per °C of change.
- Humidity coefficient of linear expansion (30%RH to 60% RH): 0.0024% per % RH of change.

Permanent dimensional changes:

- Dimensional change due to processing: 0.0014%, pre- to post-processing.

Assortment

MACO EAGLE COLOR SURVEILLANCE FILM 640 – standard sizes for traffic/surveillance applications

Size		Spool/Winding/Perforation	Order code
35 mm x 17 m	35 mm x 55 ft	Plastic core*** – EI – P – frame nr	
35 mm x 30.5 m	35 mm x 100 ft	Plastic core*** – EI – P – frame nr	
35 mm x 30.5 m	35 mm x 100 ft	Plastic reel**** – EI – P – frame nr	
35 mm x 1.66 m (36 exp)	35 mm x 6.5 ft	F-135-EI-P-frame nr	

Subject to modifications without prior notice.

Exclusively Available in Australia & New Zealand from:

INDEPENDENT PHOTOGRAPHIC SUPPLIES Pty Ltd	INDEPENDENT PHOTOGRAPHIC SUPPLIES NZ Limited
ABN: 36 105 600 351	Coy. # 1951487
P.O. Box 317, Thornleigh NSW 2120 Australia	P.O. Box 35840, Browns Bay, Auckland 0753 New Zealand
Ph: +61 2 9875 2244 Fax: +61 2 9875 5448	Ph - 1: +64 2 7485 7220 Ph - 2: +64 2 7472 2064
email: sales@iphoto.net.au www.iphoto.net.au	email: : sales@iphotonz.co.nz www.iphotonz.co.nz